



Steca PR

PR 1010, PR 1515, PR 2020, PR 3030

The Steca PR 10-30 series of charge controllers is the high-light in the range.

The latest charging technologies, combined with a Steca AtonIC state of charge determination which has been significantly improved once again, result in optimal battery maintenance and control of the module output of up to 900 Wp which can be connected to it. A large display informs the user about all operating modes with the aid of symbols. The state of charge is represented visually in the form of a tank display. Data such as voltage, current and state of charge can also be displayed digitally as figures on the display. In addition, the controller has an energy meter which can be reset by the user.



Product features

- Hybrid controller
- State of charge determination with Steca AtonIC (SOC)
- Automatic detection of voltage
- PWM control
- Multistage charging technology
- Load disconnection depending on SOC
- Automatic load reconnection
- Temperature compensation
- Common positive grounding or negative grounding on one terminal
- Integrated data logger
- Night light and morning light function
- Integrated self test
- Monthly maintenance charge

Electronic protection functions

- Overcharge protection
- Deep discharge protection
- Reverse polarity protection of load, module and battery
- Automatic electronic fuse
- Short circuit protection of load and module
- Overvoltage protection at module input
- Open circuit protection without battery
- Reverse current protection at night
- Overtemperature and overload protection
- Battery overvoltage shutdown

Displays



- Graphical LCD display
 - for operating parameters, fault messages, self test

Operation

- Simple menu-driven operation
- Programming by buttons
- Manual load switch

Certificates

- Approved by the World Bank for Nepal
- Compliant with European Standards (CE)
- RoHS compliant
- Made in Germany
- Developed in Germany
- Manufactured according to ISO 9001 and ISO 14001

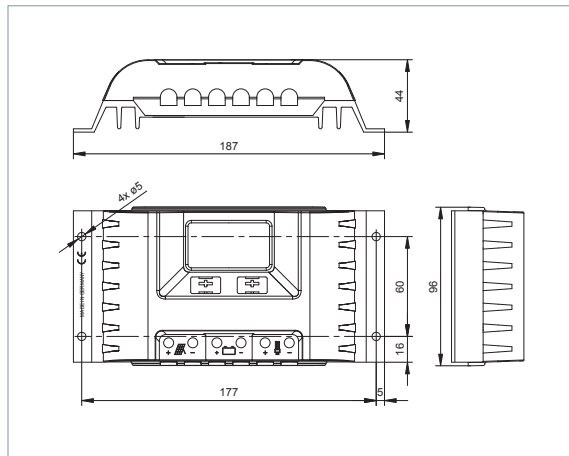

| | PR 1010 | PR 1515 | PR 2020 | PR 3030 |
|--|---|---------|---------|---------|
| Characterisation of the operating performance | | | | |
| System voltage | 12 V (24 V) | | | |
| Own consumption | 12.5 mA | | | |
| DC input side | | | | |
| Open circuit voltage solar module | < 47 V | | | |
| Module current | 10 A | 15 A | 20 A | 30 A |
| DC output side | | | | |
| Load current | 10 A | 15 A | 20 A | 30 A |
| End of charge voltage | liquid 13.9 V (27.8 V); gel 14.1 V (28.2 V) | | | |
| Boost charge voltage | 14.4 V (28.8 V) | | | |
| Equalisation charge | 14.7 V (29.4 V) | | | |
| Reconnection voltage (SOC / LVR) | > 50 % / 12.6 V (25.2 V) | | | |
| Deep discharge protection (SOC / LVD) | < 30 % / 11.1 V (22.2 V) | | | |
| Operating conditions | | | | |
| Ambient temperature | -10 °C ... +50 °C | | | |
| Fitting and construction | | | | |
| Terminal (fine / single wire) | 16 mm ² / 25 mm ² - AWG 6 / 4 | | | |
| Degree of protection | IP 32 | | | |
| Dimensions (X x Y x Z) | 187 x 96 x 44 mm | | | |
| Weight | 350 g | | | |

Technical data at 25 °C / 77 °F

Options

- Prepayment interface
- External temperature sensor
- Alarm contact



Steca PA TS10
External temperature sensor

[areas of application]

